

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Outdoor post insulator 3 kV type IN22.01

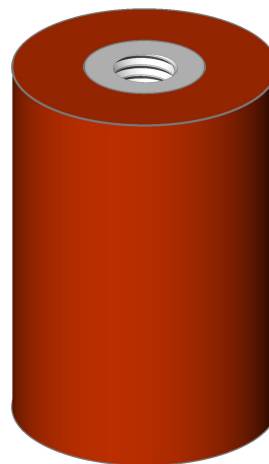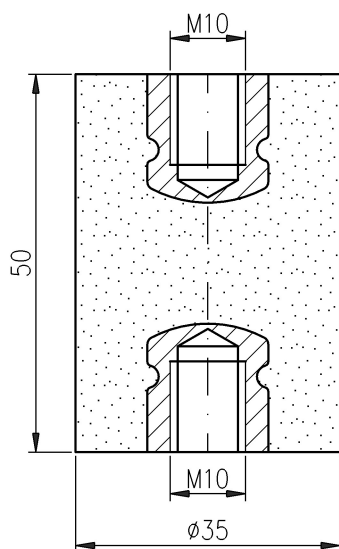

1. Insulator material:
hydrophobic compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
- M10 - 30 Nm
5. Insulator designed to work indoor and outdoor

Rated insulation voltage	3 kV
Impulse test voltage	9 kV
Dry withstand alternate voltage (50Hz, 1 min)	5 kV
Bending strength Po	4 kN
Creepage distance	50 mm
Weight	0,1 kg

Possible to make screws according to client's requirements.