

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.


Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Lębork
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post insulator 12 kV type JO16-75.bp2

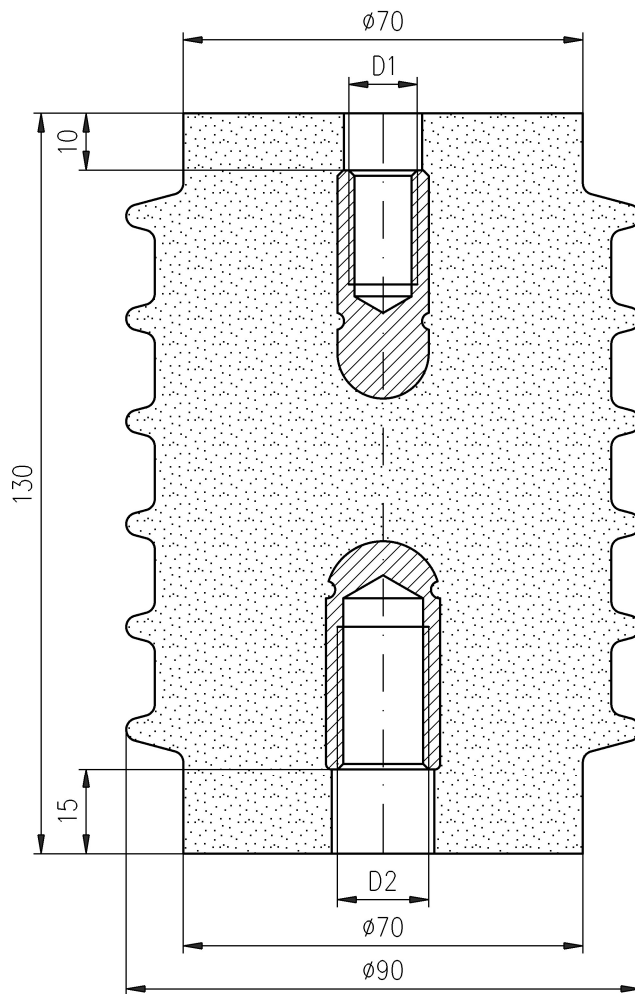

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
- M8 - 20 Nm
- M12 - 50 Nm
- M16 - 120 Nm
- M20 - 120 Nm
6. Indoor insulator
7. Possible version JOR16-75.bp2
with capacity insert

	PN	GOST
Rated insulation voltage	12 kV	10 kV
Lighting impulse withstand voltage	75 kV	80 kV
Dry withstand alternate voltage (50Hz, 1 min)	38 kV	-
Test alternate voltage (50Hz, 5 min)	-	42 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	47 kV
Bending strength Po	16 kN	
Creepage distance	173 mm	
Weight	1,3 kg	

09	M8	M8
08	M12	M12
07	M16	M16
02	M16	M20
01	M12	M16
ver. / dim.	D1	D2

Possible to make screws according to client's requirements.