

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH  
BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,  
tel. +48 59 862 01 86;  
www.boplast.pl

84-300 Lębork  
tel. 516 198 886  
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE \* IZOLATORY PRZEPUSTOWE \* WYROBY IZOLACYJNE \* USŁUGI

## Post insulator 24 kV type JO6-125.bp3.01

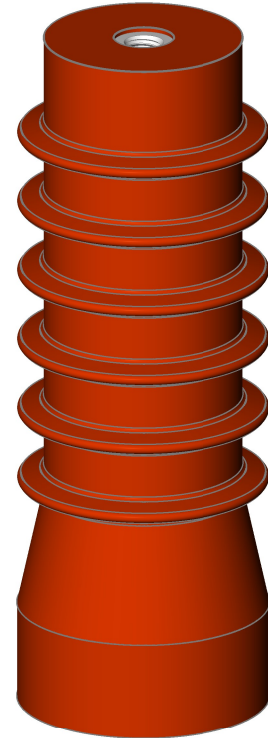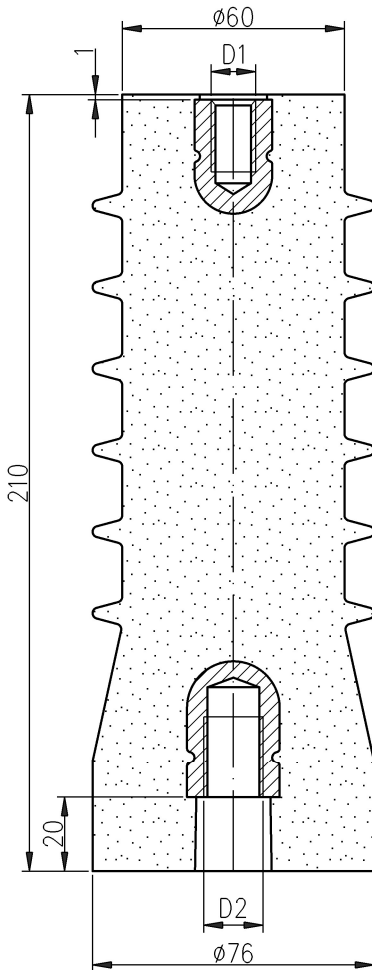

1. Insulator material:  
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
  - M10 - 30 Nm
  - M12 - 50 Nm
  - M16 - 120 Nm
  - M20 - 120 Nm
6. Indoor insulator
7. Possible version JOR6-125.bp3.01  
with capacity insert

04	M10	M16
03	M16	M20
02	M12	M16
01	M16	M16
ver. dim.	D1	D2

	PN	GOST
Rated insulation voltage	24 kV	20 kV
Lightning impulse withstand voltage	125 kV	125 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV	-
Test alternate voltage (50Hz, 5 min)	-	65 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	75 kV
Bending strength Po	6 kN	
Creepage distance	276 mm	
Weight	1,5 kg	

*Possible to make screws according to client's requirements.*