

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH  
BOPLAST Sp. z o.o.


Adres:

ul. B.Krzywoustego 1,  
tel. +48 59 862 01 86;  
www.boplast.pl

84-300 Lębork  
tel. 516 198 886  
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE \* IZOLATORY PRZEPUSTOWE \* WYROBY IZOLACYJNE \* USŁUGI

## Post insulator 7,2 kV type JO6-60.bp1

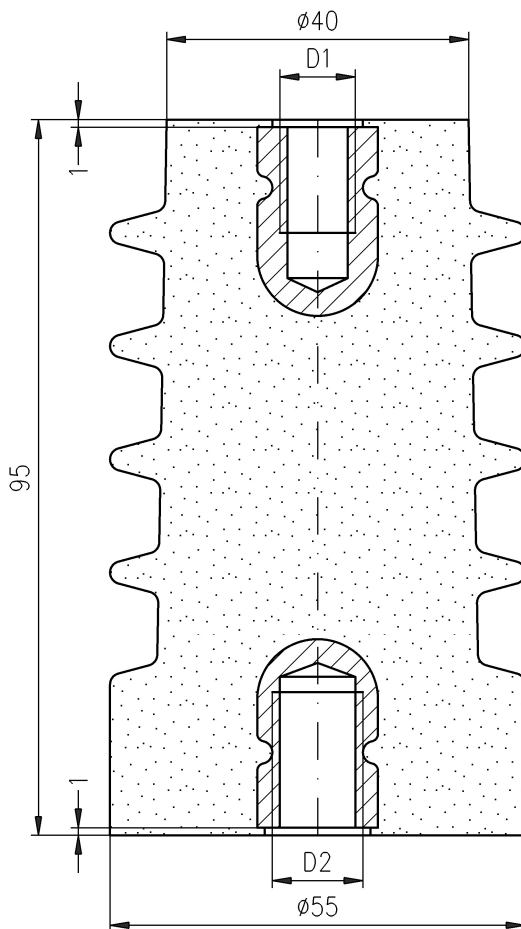

1. Insulator material:  
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Insulator meets requirements of F thermal class
6. Max screw tightening torque:
  - M10 - 30 Nm
  - M12 - 50 Nm
  - M16 - 120 Nm
7. Indoor insulator
8. Possible version JOR6-60.bp1  
with capacity insert

05	M10	M16
04	M10	M10
03	M12	M12
01	M10	M12
ver. dim.	D1	D2

	PN	GOST
Rated insulation voltage	7,2 kV	6 kV
Lighting impulse withstand voltage	60 kV	60 kV
Dry withstand alternate voltage (50Hz, 1 min)	28 kV	-
Test alternate voltage (50Hz, 5 min)	-	32 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	36 kV
Bending strength Po	6 kN	
Creepage distance	136 mm	
Weight	0,32 kg	

*Possible to make screws according to client's requirements.*