

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 12 kV type JOR16-75.bp2

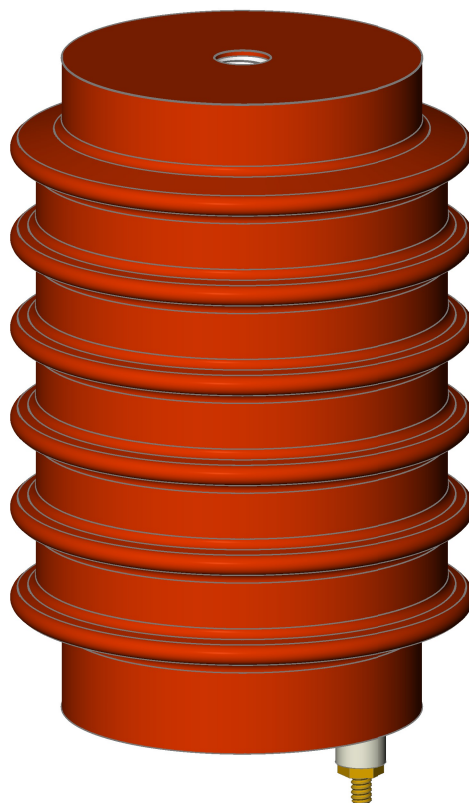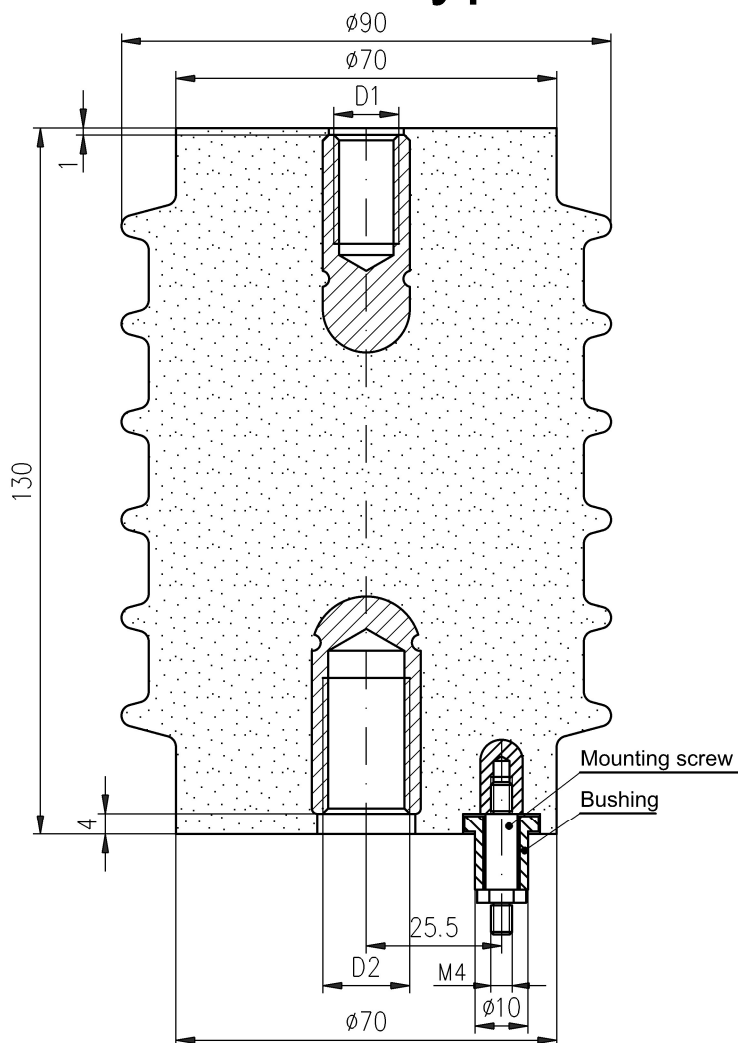

02	M16	M20
01	M12	M16
ver.	dim.	D1 D2

	PN	GOST
Rated insulation voltage	12 kV	10 kV
Lighting impulse withstand voltage	75 kV	80 kV
Dry withstand alternate voltage (50Hz, 1 min)	38 kV	-
Test alternate voltage (50Hz, 5 min)	-	42 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	47 kV
Bending strength Po	16 kN	
Creepage distance	173 mm	
Insert capacity	125 pF	
Weight	1,3 kg	

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
 - M4 - 4 Nm
 - M12 - 50 Nm
 - M16 - 120 Nm
 - M20 - 120 Nm
6. Indoor insulator
7. Connection screw and bushing included
8. Can work with our products voltage indicator WN-1 and voltage indicator with switching interlock WNS-1

Possible to make screws according to client's requirements.