

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.





Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Lębork
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 12 kV type JOR16-75.bp8

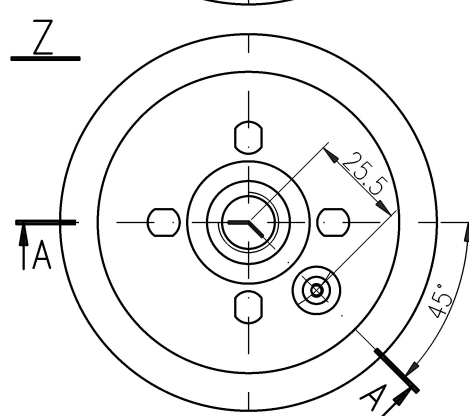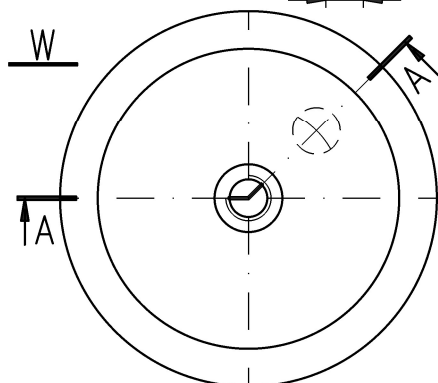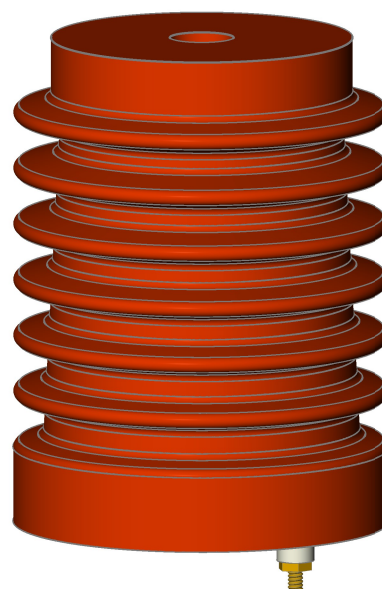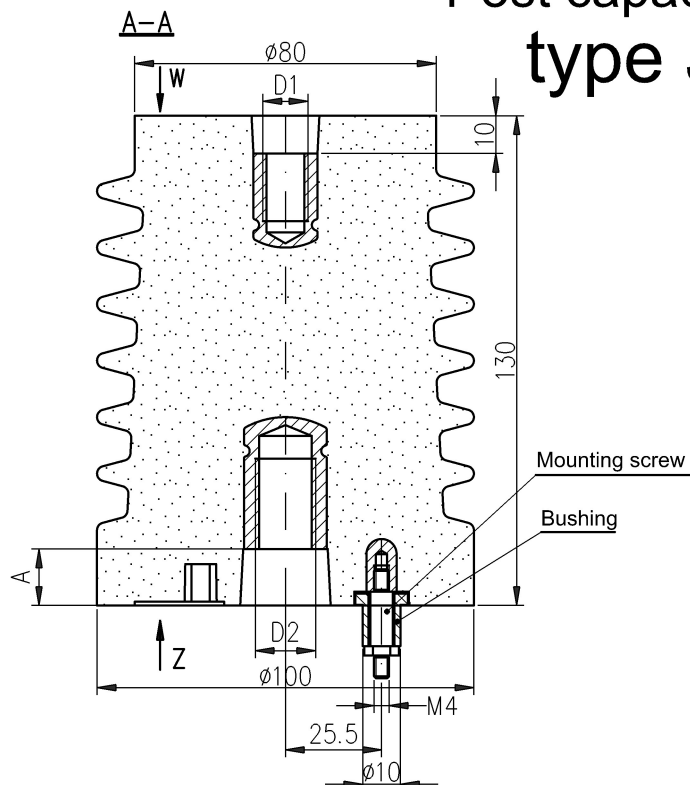

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
 - M12 - 50 Nm
 - M16 - 120 Nm
 - M20 - 120 Nm
5. Indoor insulator
6. Connection screw and bushing included
7. Can work with our products voltage indicator WN-1 and voltage indicator with switching interlock WNS-1

02	M16	M20	10
01	M12	M16	15
ver.	dim.	D1	D2
		A	

Rated insulation voltage	12 kV
Lighting impulse withstand voltage	75 kV
Dry withstand alternate voltage (50Hz, 1 min)	38 kV
Bending strength Po	16 kN
Creepage distance	220 mm
Insert capacity	125 pF
Weight	1,5 kg

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

DT BP.2.086 z dnia 19.09.2023

Order example:

Post capacitive insulator 12 kV; type JOR16-75.bp8.01 with M12/M16 screws.