

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.


Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl


84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 24 kV type JOR4-125.bp4

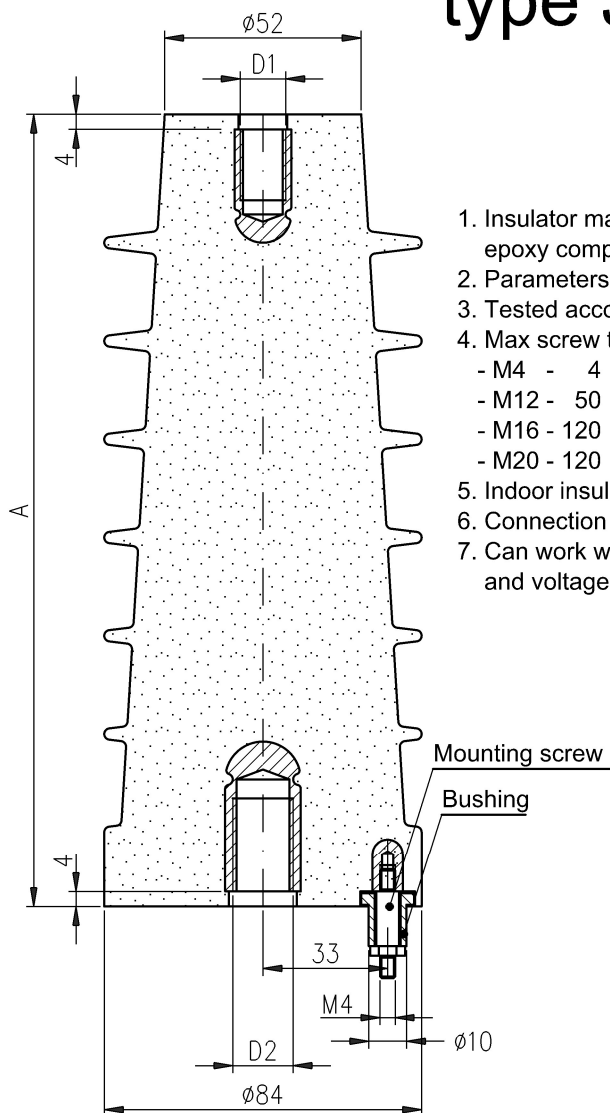

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
 - M4 - 4 Nm
 - M12 - 50 Nm
 - M16 - 120 Nm
 - M20 - 120 Nm
5. Indoor insulator
6. Connection screw and bushing included
7. Can work with our products voltage indicator WN-1
and voltage indicator with switching interlock WNS-1

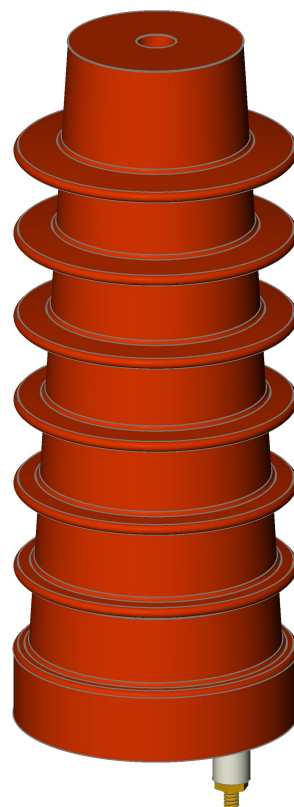

04	225	322	1,4	M12	M16
03	210	307	1,3	M12	M20
01	210	307	1,3	M12	M16
ver. dim.	A	B	C	D1	D2

Rated insulation voltage	24 kV
Lighting impulse withstand voltage	125 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV
Bending strength Po	4 kN
Creepage distance	B mm
Insert capacity	67 pF
Weight	C kg

Possible to make screws according to client's requirements.