

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.


Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl


84-300 Lębork
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 24 kV type JOR6-125.bp3.01

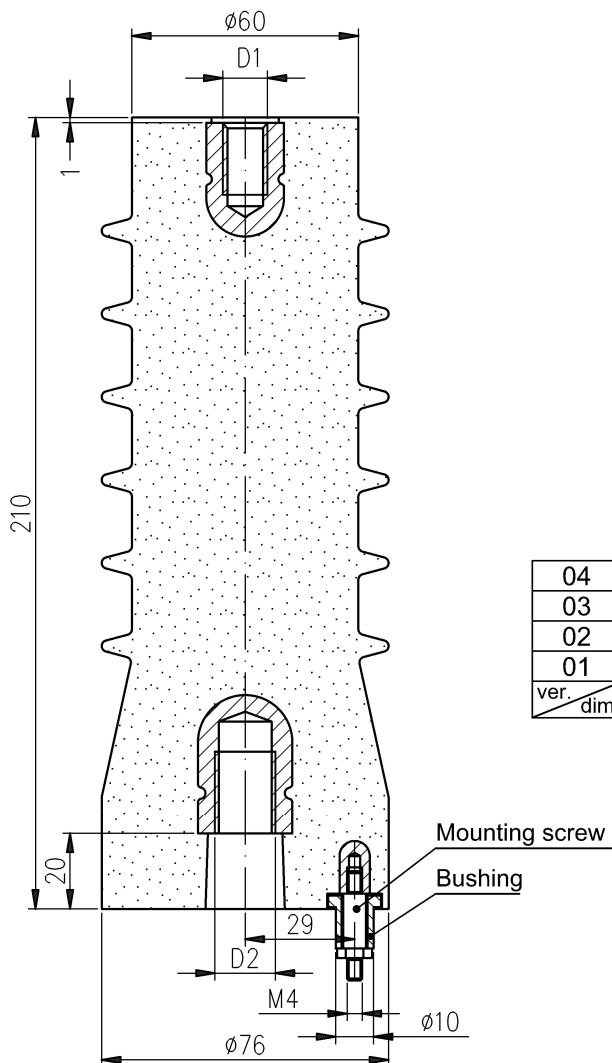

04	M10	M16
03	M16	M20
02	M12	M16
01	M16	M16
ver. dim.	D1	D2

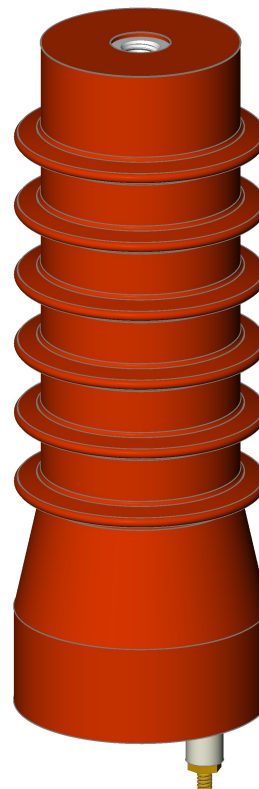

	PN	GOST
Rated insulation voltage	24 kV	20 kV
Lighting impulse withstand voltage	125 kV	125 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV	-
Test alternate voltage (50Hz, 5 min)	-	65 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	75 kV
Bending strength Po	6 kN	
Creepage distance	276 mm	
Insert capacity	67 pF	
Weight	1,5 kg	

1. Insulator material: epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
 - M4 - 4 Nm
 - M10 - 30 Nm
 - M12 - 50 Nm
 - M16 - 120 Nm
 - M20 - 120 Nm
6. Indoor insulator
7. Connection screw and bushing included
8. Can work with our products voltage indicator WN-1 and voltage indicator with switching interlock WNS-1

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

DT BP.2.055 z dnia 09.10.2009

Order example:

Post capacitive insulator 24 kV; type JOR6-125.bp3.01.02 with M12/M16 screws.