

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Lębork
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 7,2 kV type JOR6-60.bp1

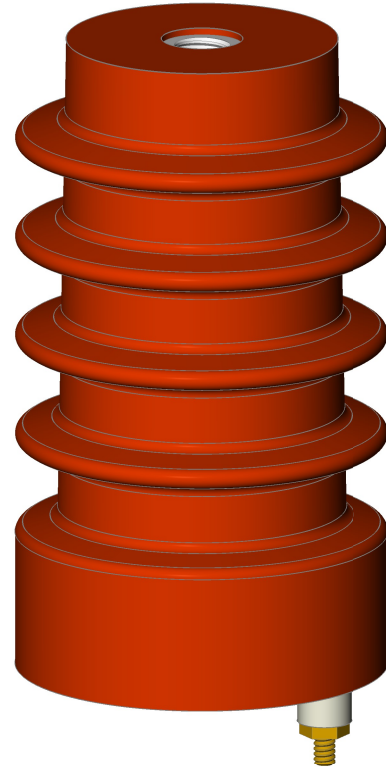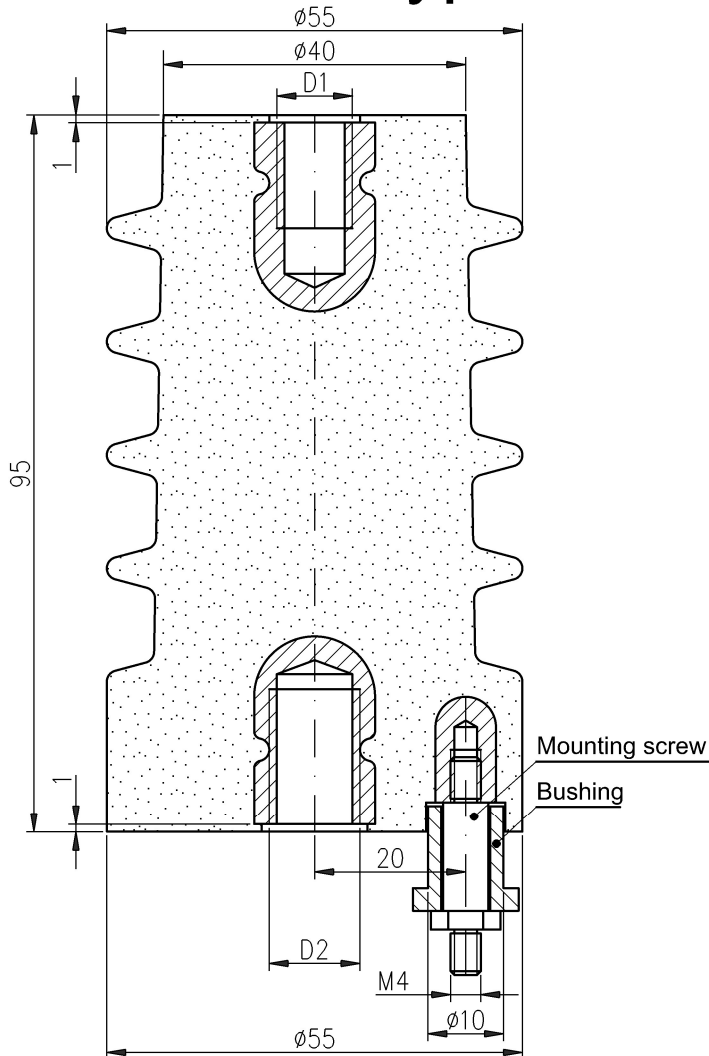

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
- M4 - 4 Nm
- M10 - 30 Nm
- M12 - 50 Nm
6. Indoor insulator
7. Connection screw and bushing included
8. Can work with our products voltage indicator WN-1
and voltage indicator with switching interlock WNS-1

	PN	GOST
Rated insulation voltage	7,2 kV	6 kV
Lighting impulse withstand voltage	60 kV	60 kV
Dry withstand alternate voltage (50Hz, 1 min)	28 kV	-
Test alternate voltage (50Hz, 5 min)	-	32 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	36 kV
Bending strength Po	6 kN	
Creepage distance	136 mm	
Insert capacity	200 pF	
Weight	0,32 kg	

03	M12	M12
01	M10	M12
ver. / dim.	D1	D2

Possible to make screws according to client's requirements.