ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.

Adres:
ul. B.Krzywoustego 1, 84-300 Lębork
tel. +48 59 862 01 86; tel. 516 198 886
www.boplast.pl e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 12 kV
type JOR6-75.bp3.01

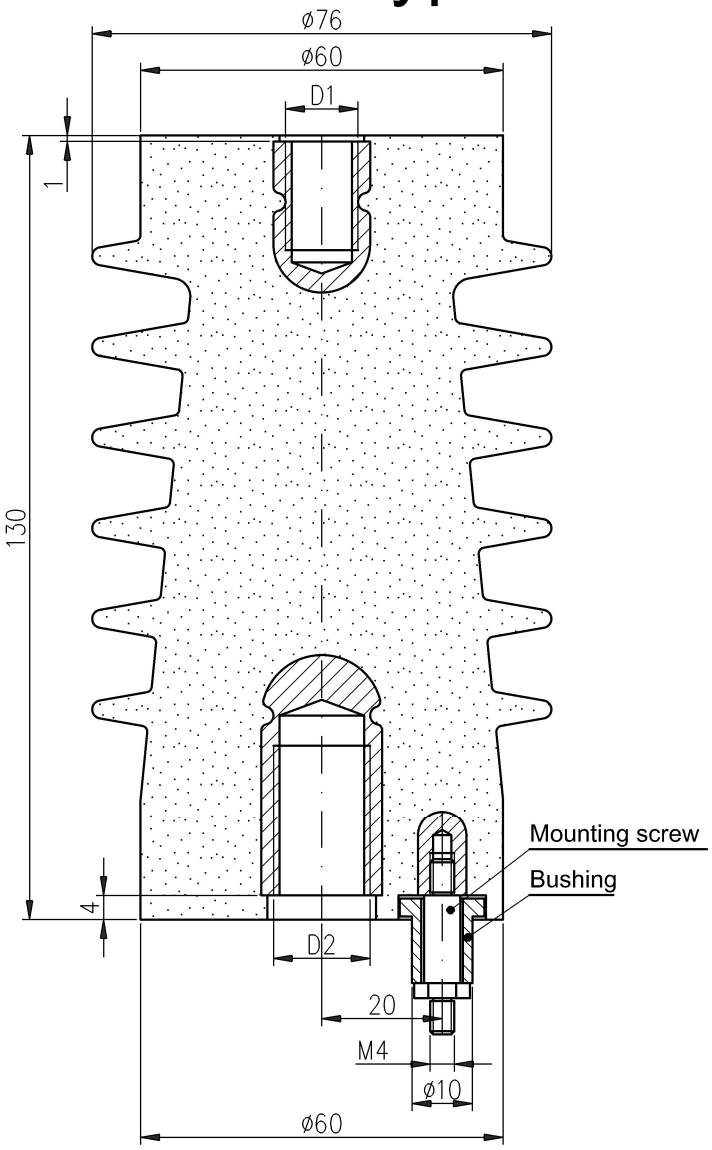

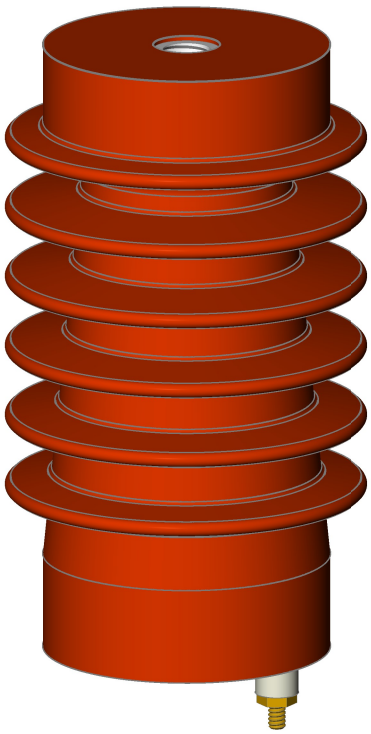

1. Insulator material:
   epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
   - M4 - 4 Nm
   - M10 - 30 Nm
   - M12 - 50 Nm
   - M16 - 120 Nm
5. Indoor insulator
6. Connection screw and bushing included
7. Can work with our products voltage indicator WN-1 and voltage indicator with switching interlock WNS-1

Rated insulation voltage	12 kV
Lighting impulse withstand voltage	75 kV
Dry withstand alternate voltage (50Hz, 1 min)	38 kV
Bending strength Po	6 kN
Creepage distance	246 mm
Insert capacity	125 pF
Weight	0,7 kg

02	M10	M16
01	M12	M16
ver. / dim.	D1	D2

Possible to make screws according to client's requirements.

All data can be changed due to technological progress | DT BP.2.052 z dnia 16.03.2009

Order example:
Post capacitive insulator 12 kV; type JOR6-75.bp3.01 with M12/M16 screws.