

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 24 kV type JOR8-125.bp3.02

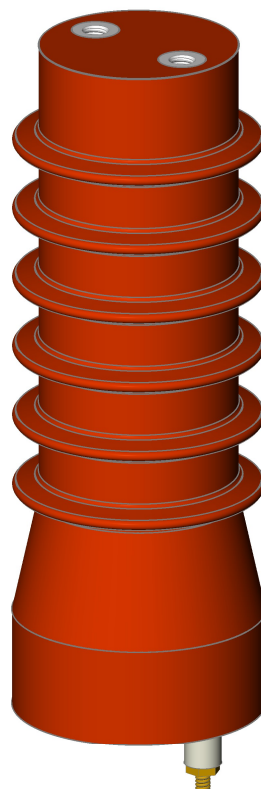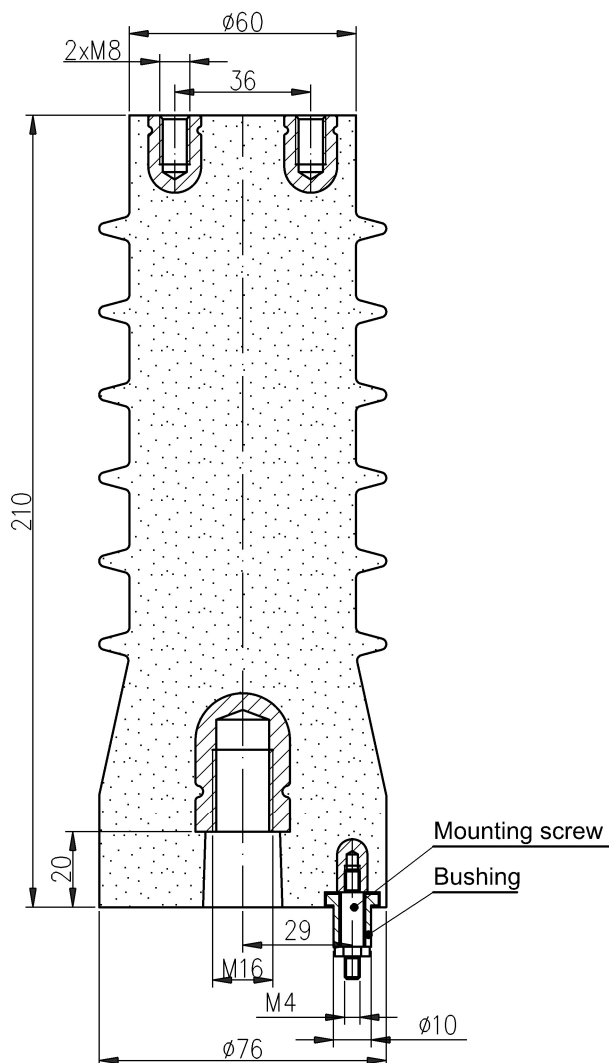

	PN	GOST
Rated insulation voltage	24 kV	20 kV
Lighting impulse withstand voltage	125 kV	125 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV	-
Test alternate voltage (50Hz, 5 min)	-	65 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	75 kV
Bending strength Po	8 kN	
Creepage distance	276 mm	
Insert capacity	67 pF	
Weight	1,5 kg	

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
 - M4 - 4 Nm
 - M8 - 20 Nm
 - M16 - 120 Nm
6. Indoor insulator
7. Connection screw and bushing included
8. Can work with our products voltage indicator WN-1 and voltage indicator with switching interlock WNS-1

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

DT BP.4.014 z dnia 08.05.2008

Order example:

Post capacitive insulator 24 kV; type JOR8-125.bp3.02 with 2xM8/M16 screws.