

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 12 kV type JOR8-75.bp7

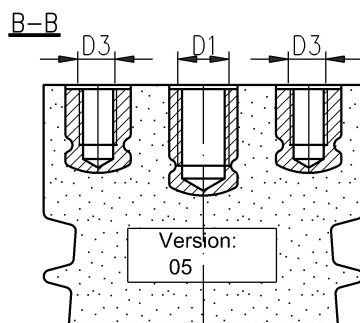
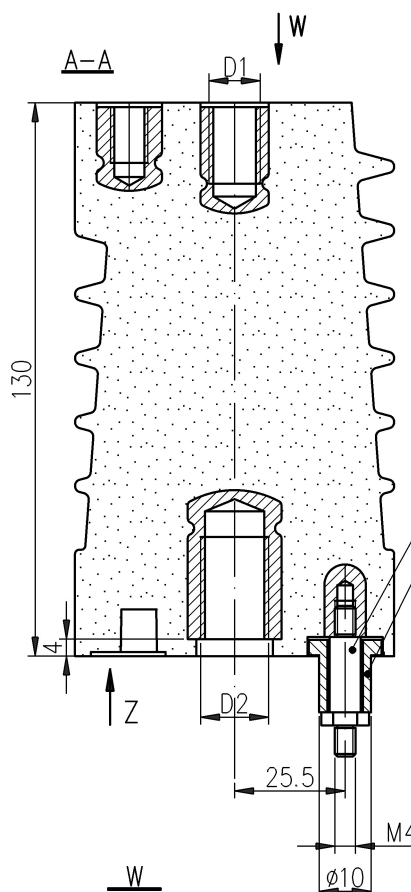


Mounting screw
Bushing

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
 - M4 - 4 Nm
 - M8 - 20 Nm
 - M12 - 50 Nm
 - M16 - 120 Nm
 - M20 - 120 Nm
6. Indoor insulator
7. Connection screw and bushing included
8. Can work with our products voltage indicator WN-1
and voltage indicator with switching interlock WNS-1



10	M12	M12	-
05	M12	M16	M8
04	M12	M20	-
03	M16	M20	-
02	M12	M16	-
01	M16	M16	-
ver. dim.	D1	D2	D3

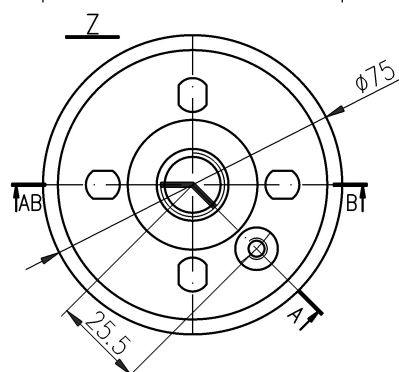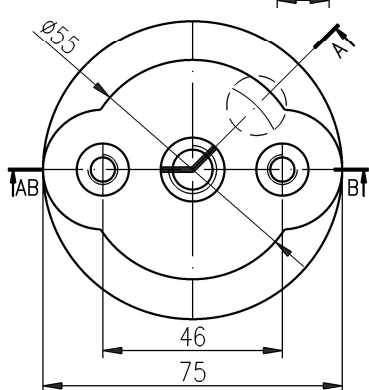

	PN	GOST
Rated insulation voltage	12 kV	10 kV
Lighting impulse withstand voltage	75 kV	80 kV
Dry withstand alternate voltage (50Hz, 1 min)	38 kV	-
Test alternate voltage (50Hz, 5 min)	-	42 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	47 kV
Bending strength Po	10 kN	
Creepage distance	182 mm	
Insert capacity	125 pF	
Weight	0,9 kg	

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

DT BP.2.078 z dnia 09.01.2019

Order example:

Post capacitive insulator 12 kV; type JOR8-75.bp7.05 with 2xM8/M12/M16 screws.