

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl



84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Post capacitive insulator 17,5 kV type JOR8-95.bp7

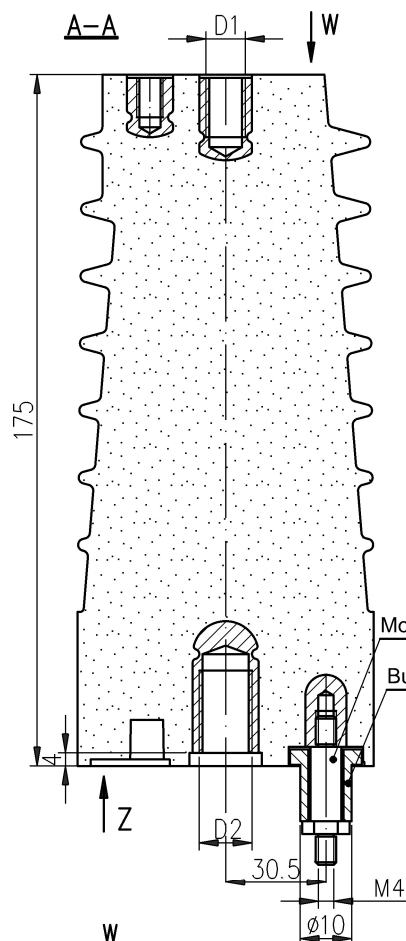

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Requirements according to GOST 1516.1-76
5. Max screw tightening torque:
- M4 - 4 Nm
- M8 - 20 Nm
- M12 - 50 Nm
- M16 - 120 Nm
- M20 - 120 Nm
6. Indoor insulator
7. Connection screw and bushing included
8. Can work with our products voltage indicator WN-1
and voltage indicator with switching interlock WNS-1

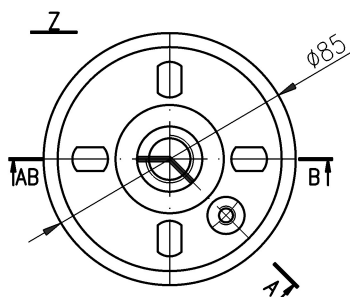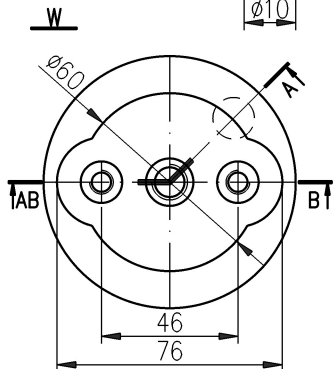

05	M12	M16	M8
04	M12	M20	-
03	M16	M20	-
02	M12	M16	-
01	M16	M16	-
ver. dim.	D1	D2	D3

	PN	GOST
Rated insulation voltage	17,5 kV	15 kV
Lighting impulse withstand voltage	95 kV	105 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV	-
Test alternate voltage (50Hz, 5 min)	-	55 kV
Test alternate instantaneous voltage (50Hz, 1 kV/s)	-	63 kV
Bending strength Po	8 kN	
Creepage distance	235 mm	
Insert capacity	91 pF	
Weight	1,6 kg	

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

DT BP.2.079 z dnia 16.01.2019

Order example:

Post capacitive insulator 17,5 kV; type JOR8-95.bp7.05 with 2xM8/M12/M16 screws.