
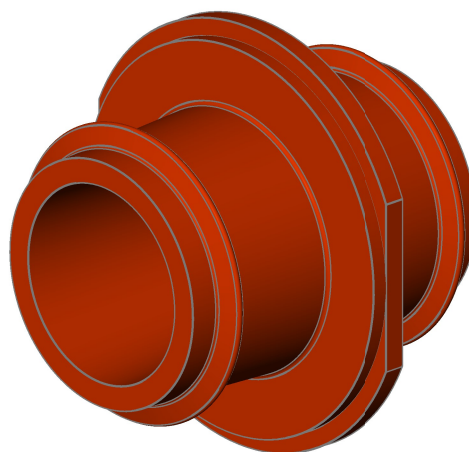
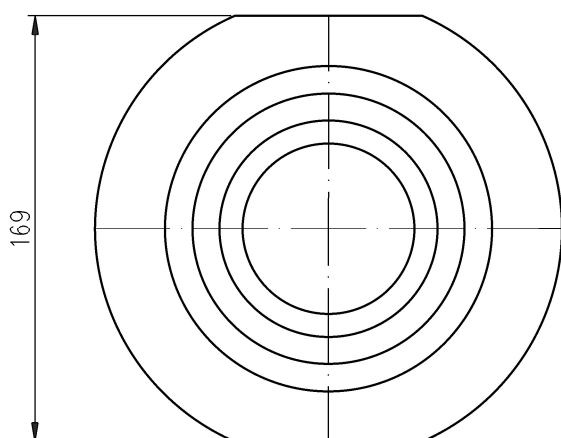


Bushing insulator 12 kV
type SPWSG.bp1-20/12/1600.02

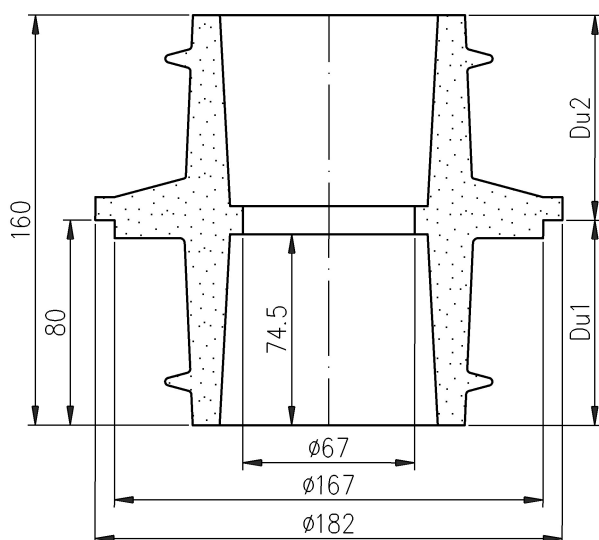

1. Insulator material:
epoxy compound
2. Voltage, temperature and short circuit requirements
according to PN-EN 60137
3. Indoor insulator

Rated insulation voltage		12 kV
Lighting impulse withstand voltage		75 kV
Dry withstand alternate voltage (50Hz, 1 min)		28 kV
Rated current		1600 A
Bending strength Po		20 kN
Creepage distance	Du1	121 mm
	Du2	123 mm
Weight		1.9 kg

1. Insulator is mounted to subsoil (wall, partition) using three bushings and M12 screws.
2. Bushings are included in the package.
3. Centricity of current rails in relation to the opening of insulator provide upper and lower inserts. The inserts are fitted to insulator using two M6 screws.
4. Inserts, screws M6 and M12 are not included in the package.
5. Inserts are made according to client's specified requirements.

Example of insulator assembly

