

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl


84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Bushing insulator 12 kV type SPWSG.bp4-20/12/3,15

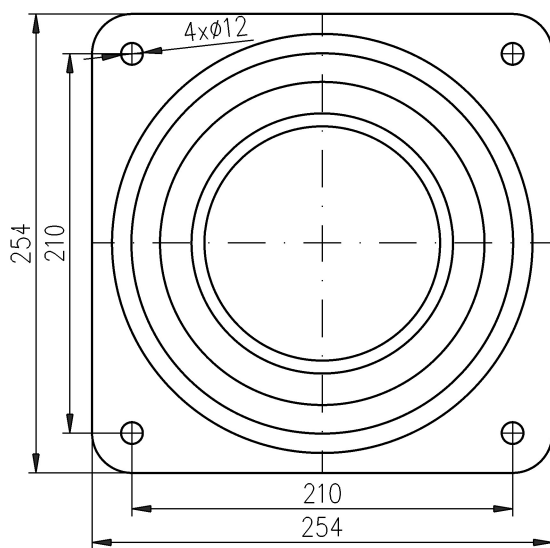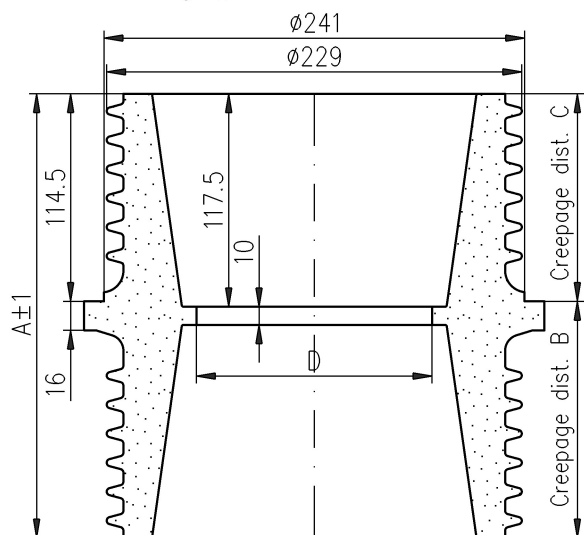


Rated insulation voltage	12 kV
Lighting impulse withstand voltage	75 kV
Dry withstand alternate voltage (50Hz, 1 min)	28 kV
Rated current	3150 A
Bending strength Po	20 kN
Creepage distance	C mm
	B mm

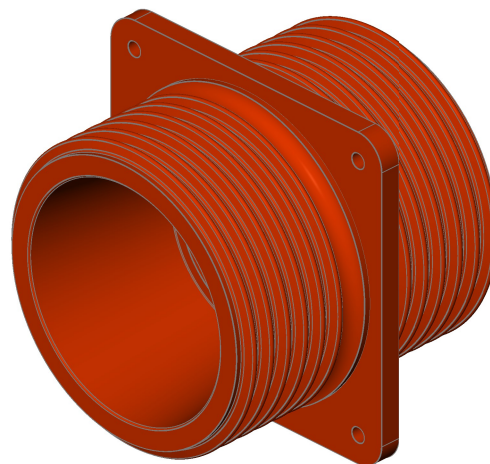

1. Insulator material:
epoxy compound
2. Voltage, temperature and short circuit requirements
according to PN-EN 60137
3. Indoor insulator

04	245	220	194	Ø138	8 kg
03	245	220	194	Ø135	8 kg
02	229	192	194	Ø120	7,5 kg
ver. dim.	A	B	C	D	Weight

Example of insulator assembly

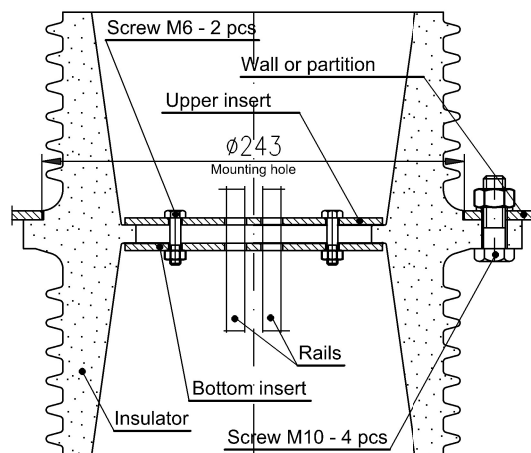

1. Insulator is mounted to subsoil (wall, partition) using four M10 screws.
2. Centricity of current rails in relation to the opening of insulator provide upper and lower inserts.
3. The inserts are fitted to insulator using two M6 screws.
4. Inserts, screws M6 and M10 are not included in the package.
5. Inserts are made according to client's specified requirements.

All data can be changed due to technological progress

DT BP.3.102; RD2.1.303 z dnia 27.12.2022

Order example:

Bushing insulator SPWSG.bp4-20/12/3,15 version 03. Rail dimensions 2 x (10 x 100mm).