

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.




Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Lębork
tel. 516 198 886
e-mail: boplast@boplast.pl

IZOLATORY WSPORCZE * IZOLATORY PRZEPUSTOWE * WYROBY IZOLACYJNE * USŁUGI

Bushing insulator 12 kV type SPWSG.bp6-20/12/A

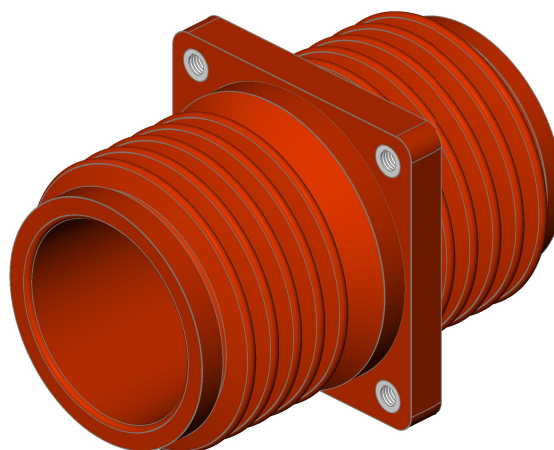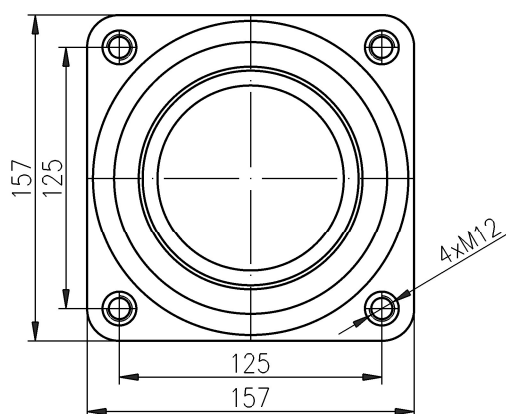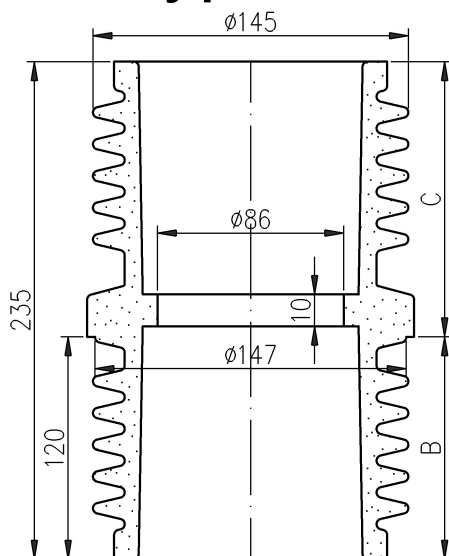

1. Insulator material:
epoxy compound
2. Voltage, temperature and short circuit requirements
according to PN-EN 60137
3. Max screw tightening torque:
- M12 - 50 Nm
4. Indoor insulator

Rated insulation voltage	12 kV
Lighting impulse withstand voltage	75 kV
Dry withstand alternate voltage (50Hz, 1 min)	28 kV
Rated current	A 630 A 1250 A 1600 A 2000 A
Bending strength Po	20 kN
Creepage distance	B 236 mm C 239 mm
Weight	2,6 kg

1. Insulator is mounted to subsoil (wall, partition) using four M12 screws.
2. Centricity of current rails in relation to the opening of insulator provide upper and lower inserts.
3. The inserts are fitted to insulator using two M6 screws.
4. Inserts are not included with insulator. They should be ordered separately.
5. Inserts are made according to client's specified requirements.
6. Rated current value "A" specified in table.

Example of insulator assembly

