

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

POST INSULATORS * BUSHING INSULATORS * INSULATION PRODUCTS * SERVICES

Post insulator 24 kV type JO8-125

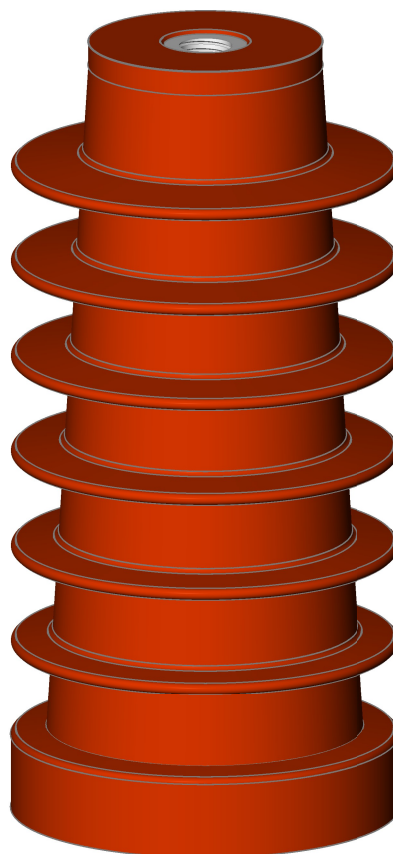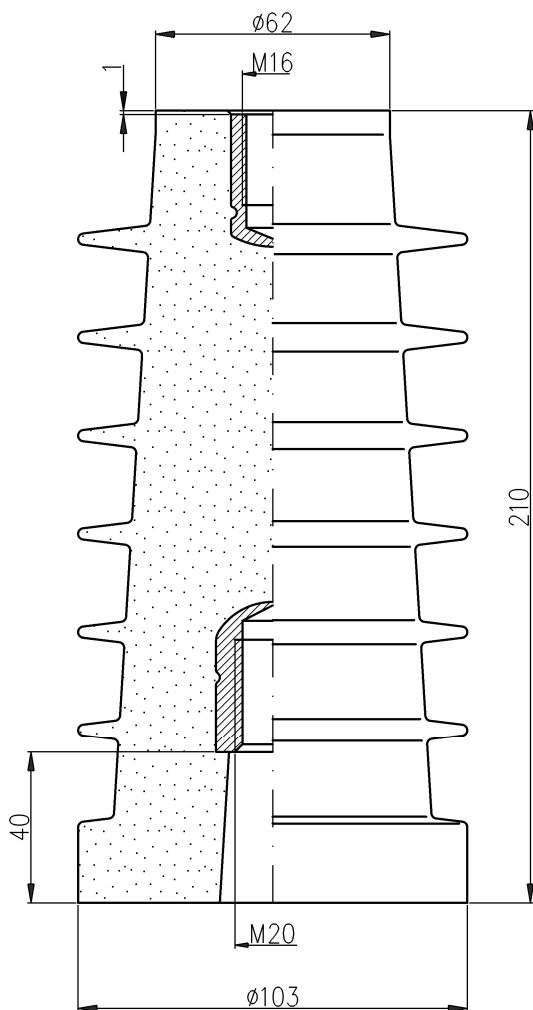

1. Insulator material:
epoxy compound
2. Parameters according to PN-90/E06322/01
3. Tested according to PN-91/E-06340
4. Max screw tightening torque:
 - M16 - 120 Nm
 - M20 - 120 Nm
5. Indoor insulator

Rated insulation voltage	24 kV
Lightning impulse withstand voltage	125 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV
Bending strength Po	8 kN
Creepage distance	363 mm
Weight	2,2 kg