

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH
BOPLAST Sp. z o.o.




Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

POST INSULATORS * BUSHING INSULATORS * INSULATION PRODUCTS * SERVICES

Post insulator 3 kV type SK 30x30x26x8

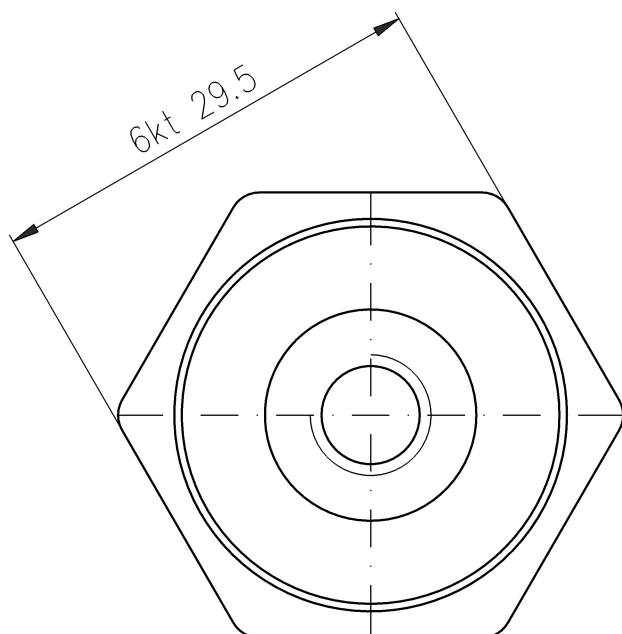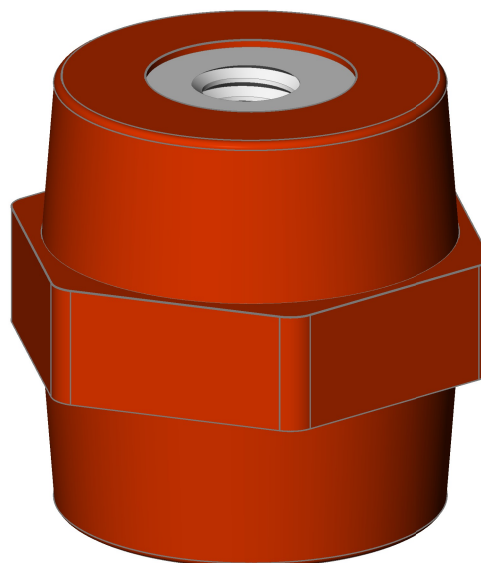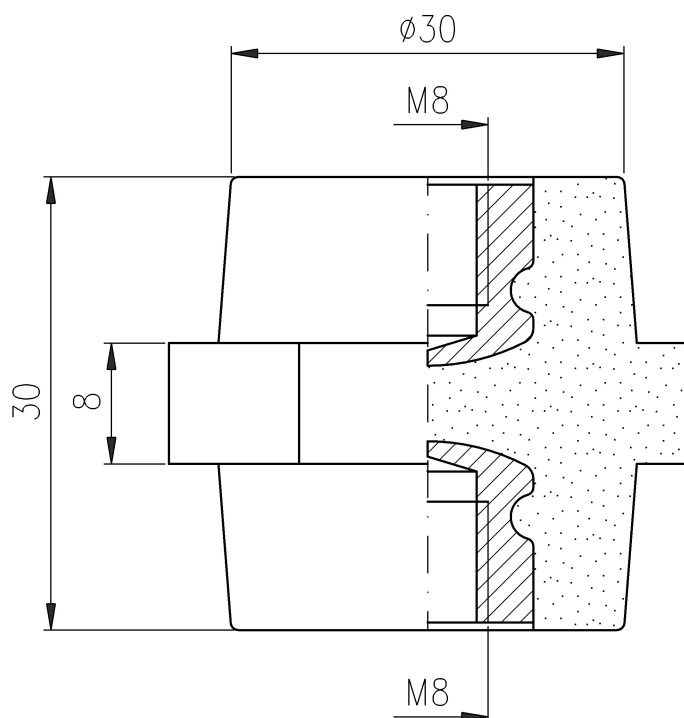

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
- M8 - 20 Nm
5. Indoor insulator

Rated insulation voltage	3 kV
Lightning impulse withstand voltage	9 kV
Dry withstand alternate voltage (50Hz, 1 min)	5 kV
Bending strength Po	4 kN
Creepage distance	33 mm
Weight	0,05 kg

Possible to make screws according to client's requirements.