

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.


Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl



84-300 Łęborg
tel. 516 198 886
e-mail: boplast@boplast.pl

POST INSULATORS * BUSHING INSULATORS * INSULATION PRODUCTS * SERVICES

Post insulator 36 kV type JO8-170.bp3.03

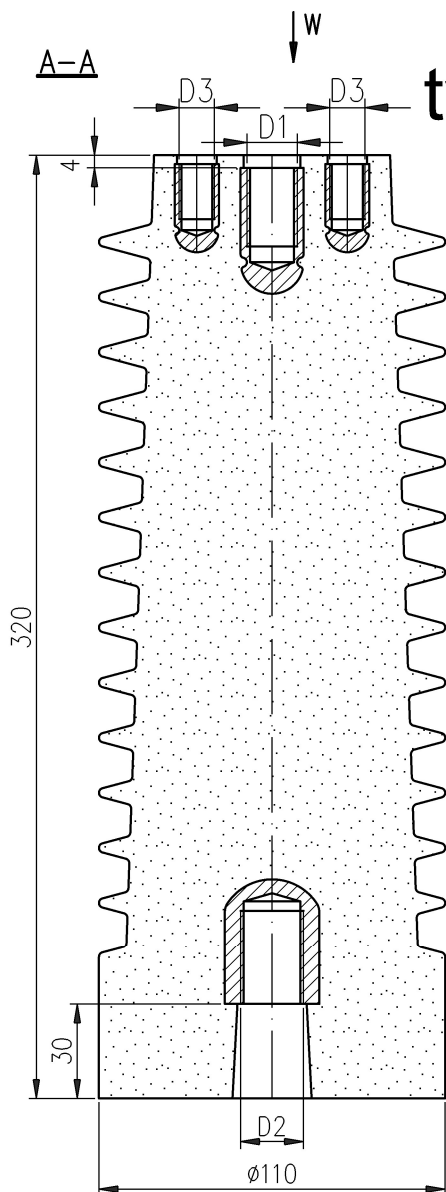

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
 - M8 - 20 Nm
 - M10 - 30 Nm
 - M16 - 120 Nm
5. Indoor insulator
6. Possible version JOR8-170.bp3
with capacity insert

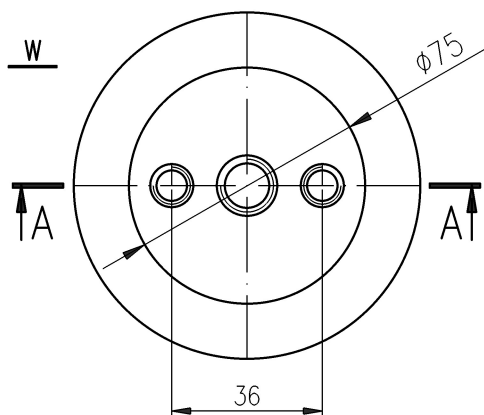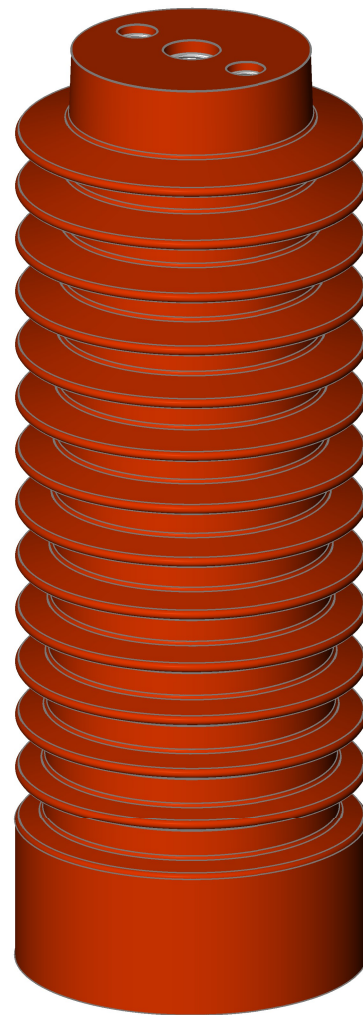

03	M10	M16	M8
ver.	D1	D2	D3
dim.			

Rated insulation voltage	36 kV
Lightning impulse withstand voltage	170 kV
Dry withstand alternate voltage (50Hz, 1 min)	70 kV
Bending strength Po	8 kN
Creepage distance	565 mm
Weight	4,3 kg

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

TD BP.1.028 from day 14.02.2017

Order example:

Post insulator 36 kV; type JO8-170.bp3.03 with 2xM8-M10/M16 screws.