

ZAKŁAD IZOLATORÓW ELEKTROTECHNICZNYCH BOPLAST Sp. z o.o.



Adres:

ul. B.Krzywoustego 1,
tel. +48 59 862 01 86;
www.boplast.pl

84-300 Lębork
tel. 516 198 886
e-mail: boplast@boplast.pl



POST INSULATORS * BUSHING INSULATORS * INSULATION PRODUCTS * SERVICES

Post insulator 24 kV type JO8-125.bp7

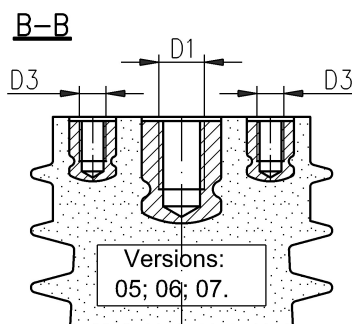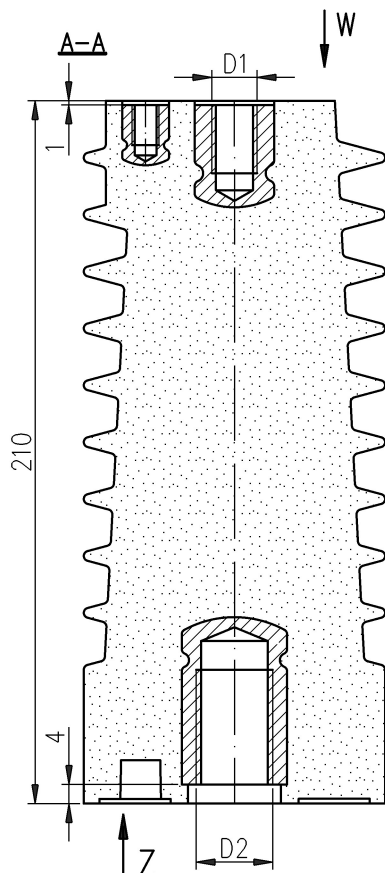

1. Insulator material:
epoxy compound
2. Parameters according to PN-IEC 60273
3. Tested according to PN-EN 60660
4. Max screw tightening torque:
 - M6 - 7 Nm
 - M8 - 20 Nm
 - M10 - 30 Nm
 - M12 - 50 Nm
 - M16 - 120 Nm
 - M20 - 120 Nm
 - M24 - 120 Nm
5. Indoor insulator
6. Possible version JOR8-125.bp7
with capacity insert

08	M24	M20	-
07	M12	M16	M6
06	M12	M20	M10
05	M12	M16	M8
04	M12	M20	-
03	M16	M20	-
02	M12	M16	-
01	M16	M16	-
ver. dim.	D1	D2	D3

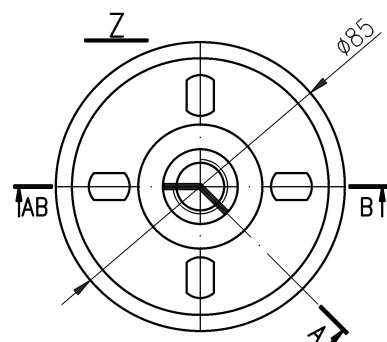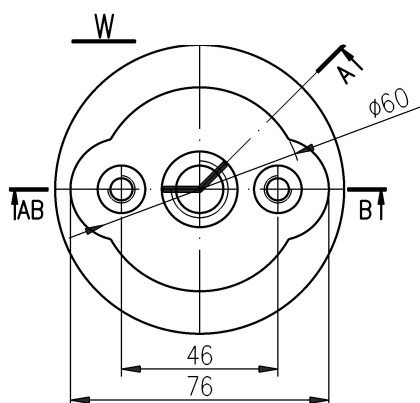

	PN
Rated insulation voltage	24 kV
Lightning impulse withstand voltage	125 kV
Dry withstand alternate voltage (50Hz, 1 min)	50 kV
Bending strength Po	8 kN
Creepage distance	348 mm
Weight	1,9 kg

Possible to make screws according to client's requirements.

All data can be changed due to technological progress

TD BP.1.031 from day 20.08.2024

Order example:

Post insulator 24 kV; type JO8-125.bp7.05 with 2xM8-M12/M16 screws.